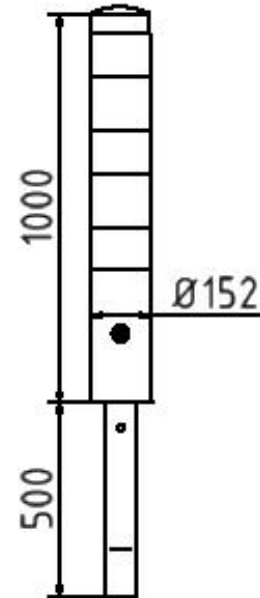


**Artikelnummer/Itemnumber: 40151FBG**

Afneembare stalen stootpaal Ø 152 x 3,2 mm, met geel/zwart en driehoekslot

Steel tube bollard Ø 152 x 3,2 mm removable, with triangular locking mechanism yellow / black

**Product beschrijving:**

Afzetpaal type 40151FBG

-uitneembaar- Ø 152mm, met driehoekslot, thermisch verzinkt, geel/zwart

Doel van gebruik:

Voor het beveiligen van fabrieksterreinen, machines en installaties of opritten.

Technische specificaties:

Gewicht: 26,00 kg/St

Materiaal:
S235 JR

Oppervlak:
Thermisch verzinkt en gepoedercoat

item description:

Steel tube bollard Ø 152 x 3,2 mm removable, with triangular locking mechanism yellow / black

designated purpose:

For protecting work sites, machines and facilities or gateways.

technical specifications:

weight: 26,00 kg/pc


material:
S235 JR

surface:
hot dipped galvanized and powder coated

Artikelnummer/Itemnumber: 40151HBG

Stalen stootpaal Ø 152 x 3,2 mm, afneembaar, zonder slot, totale lengte: 1500 mm, thermisch verzinkt en geel gecoat met drie zwarte banden.

Steel tube bollard Ø 152 x 3.2 mm removable, without locking mechanism yellow / black, total length: 1500 mm, hot-dip galvanized and coated yellow with three black stripes

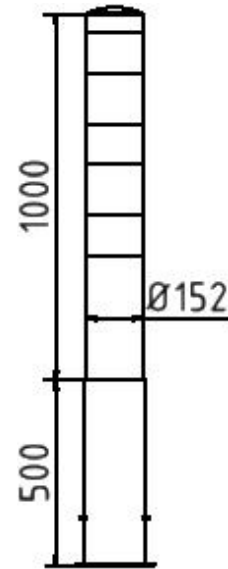

product beschrijving:

Stalen stootpaal Ø 152 x 3,2 mm dik, uitneembaar zonder slot met gelaste stalen kap, inclusief grondbus art.nr. 40151.10, totale lengte: 1500 mm, thermisch verzinkt en geel gecoat met drie zwarte strepen

Doel van gebruik:

Voor het beveiligen van fabrieksterreinen, machines en installaties of opritten.

Technische specificaties:

Gewicht: 26,00 kg/St

Materiaal:
S235 JR

Oppervlak:
Thermisch verzinkt en gepoedercoat

item description:

Steel tube bollard Ø 152 x 3.2 mm thick, removable without locking mechanism with welded steel cap, including ground socket part-no. 40151.10, total length: 1500 mm, hot-dip galvanized and coated yellow with three black stripes

designated purpose:

For protecting work sites, machines and facilities or gateways.

technical specifications:

weight: 26,00 kg/pc


material:
S235 JR

surface:
hot dipped galvanized and powder coated

**Artikelnummer/Itemnumber: 40152HBG**

Stalen stootpaal Ø 152 x 3,2 mm, afneembaar, zonder slot, totale lengte: 2000 mm, thermisch verzinkt en geel gecoat met drie zwarte banden.

Steel tube bollard Ø 152 x 3.2 mm removable, without locking mechanism yellow / black, total length: 2000 mm, hot-dip galvanized and coated yellow with three black stripes

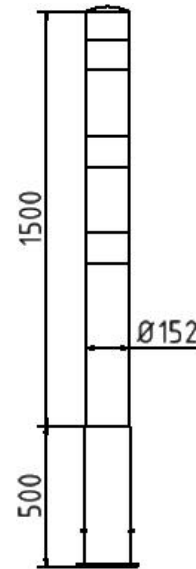**product beschrijving:**

Stalen stootpaal Ø 152 x 3,2 mm dik, uitneembaar zonder slot met gelaste stalen kap, inclusief grondbus art.nr. 40151.10, totale lengte: 2000 mm, thermisch verzinkt en geel gecoat met drie zwarte strepen

Doel van gebruik:

Voor het beveiligen van fabrieksterreinen, machines en installaties of opritten.

Technische specificaties:

Gewicht: 32,00 kg/St

Materiaal:
S235 JR

Oppervlak:
Thermisch verzinkt en gepoedercoat

item description:

Steel tube bollard Ø 152 x 3.2 mm thick, removable without locking mechanism with welded steel cap, including ground socket part-no. 40151.10, total length: 2000 mm, hot-dip galvanized and coated yellow with three black stripes

designated purpose:

For protecting work sites, machines and facilities or gateways.

technical specifications:

weight: 32,00 kg/pc

material:
S235 JR

surface:
hot dipped galvanized and powder coated